

1 SQUARE TIME OF DAY CLOCK **BUY NOW**

CLK/001/STD*

18" (450mm) sq time of day clock with a constantly moving sweeping second hand (suitable for both time of day and pace timing), set within a aluminium frame. White dial with black numbers and red 5-60 second inner ring. Fitted with a high torque quartz movement. LR6 (AA) Alkaline battery (included) with an approximate viewing distance of 40m. Suitable for sports halls and swimming pool areas



2 OPEN FACED TIME OF DAY CLOCK **BUY NOW**

Open faced time of day clock, in a square metal framing. High torque quartz movement. LR6 (AA) Alkaline battery (included) with an approximate viewing distance of 60m for 610mm clock and 80m for 850mm clock. Suitable for sports halls and swimming pool areas

CLK/002/STD* 24" (610mm) sq diameter

CLK/003/STD* 33.5" (850mm) sq diameter




3 PACE CLOCK **BUY NOW**

24" (610mm) diameter open face pace clock with silver metal framing and sweeping second hand

CLK/016/STD* Battery quartz movement

CLK/017/STD* Mains powered

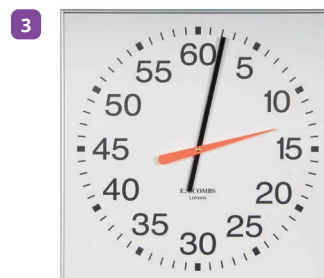

4 PLASTIC CASED CLOCK - RADIO CONTROLLED MOVEMENT **BUY NOW**

White plastic cased clock with shatterproof front lens, white dial with black Arabic numerals with hour, minute and second hands. Fitted with the battery (batteries included) extended life radio control clock movement - up to 4 years for 12" and up to 5 years for 16.5" (maintains 100% time keeping accuracy and automatically updates for summer/winter time changes providing a signal is being received - see website for details)

CLK/018/STD* 12" (303mm) diameter

CLK/019/STD* 16.5" (420mm) diameter



5 WIRE GUARD **BUY NOW**

Wire guard/protective metal grill, white coating with 4 fixing points to the wall (plugs and screws included)


CLK/001/WIR* For 400/450mm clocks

CLK/002/WIR* For 600/610mm clocks

CLK/003/WIR* For 850mm clocks



6

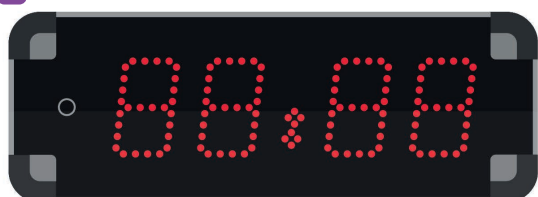

6 LED DIGITAL CLOCK **BUY NOW**

Wall-mounted LED clock with 4 red LED digits with unbreakable and anti-reflection polycarbonate front face, mains powered. Comes with infra-red control

CLK/001/LED* 9cm high digits - Readability Distance: 35m

CLK/002/LED* 12cm high digits - Readability Distance: 50m