





All UNITRAMP trampolines are constructed to the same high standards. Frames are manufactured from extra heavy gauge steel tube, are zinc plated to provide scratch resistant hardwearing and attractive finish. Coverall frame pads made from lightweight foam and covered in nylon reinforced flame retardant PVC

All trampolines conform to BSEN 13219

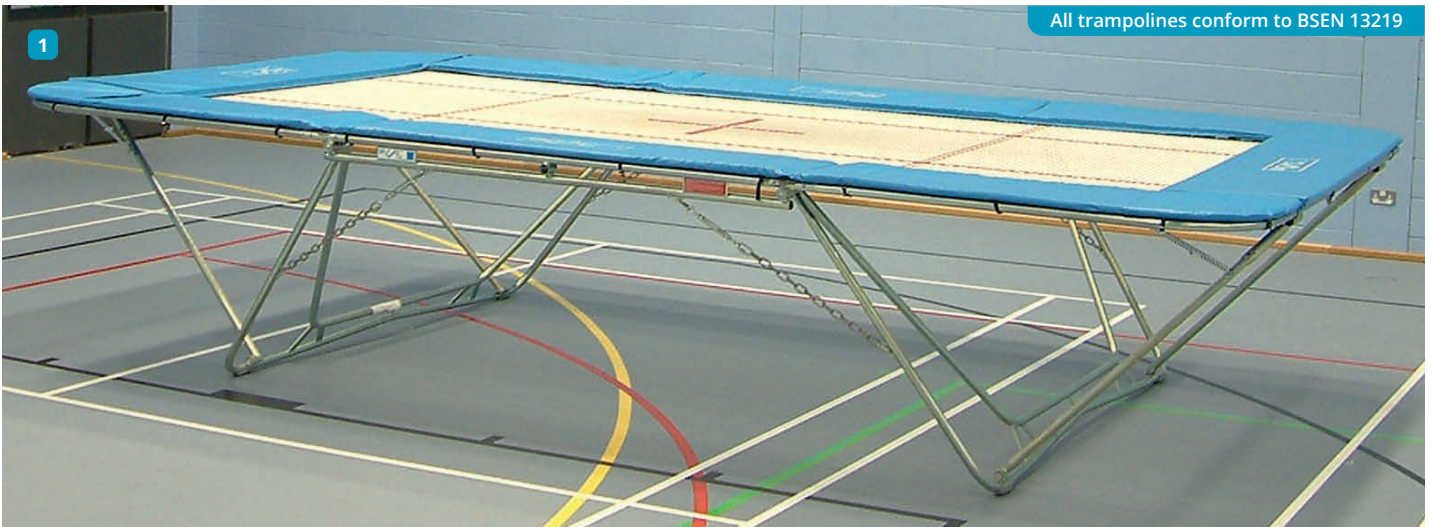

LIFT/LOWER ROLLER STANDS:

Available on all size trampolines (except safety side models). These rollerstands facilitate folding and enable any trampoline to pass through a standard size door when folded

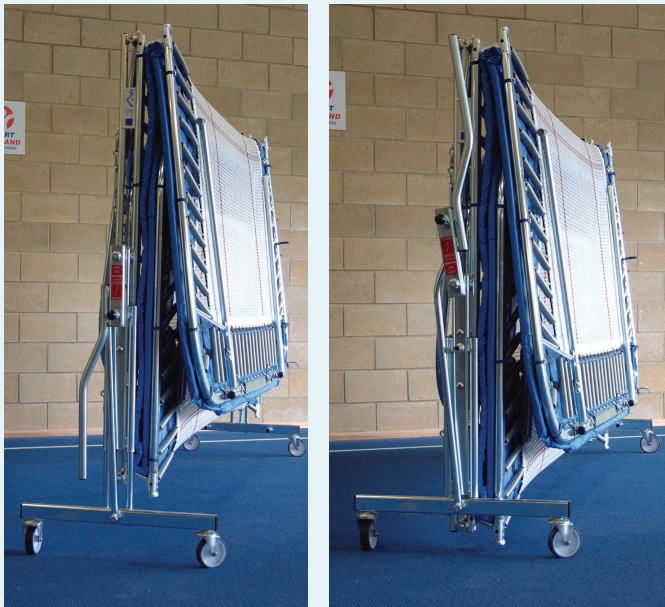

FIXED SAFETY SIDES:

The ultimate coaching aid enabling the instructor to stay close to the performer at all times. Available on M and GM models (not compatible with lift/lower rollerstands)



SIZES:

Three sizes of trampoline are manufactured to suit all needs from beginners to international competition

Model GMEX

International competition model trampoline - nominal frame size 5.1m x 3.0m x 1.15m (our equivalent to Nissen DInamic, Grand Master Exclusive and 101 series trampolines)

Model GM

The most popular club and sports hall trampoline - nominal frame size 5.1m x 3.0m x 1.05m (our equivalent to Nissen Goliath trampolines, Euro Grandmaster and 99 series trampolines)

Model M

The most popular school model trampoline - nominal frame size 4.6m x 2.7m x 1.0m (our equivalent to Nissen 77a trampolines, Euro Master and 77 series trampolines)

OPTIONS:

- ✓ Suspension can be either elastic rubber cables or steel springs
- ✓ Beds are manufactured from either solid nylon or nylon webbing, 6 x 4mm, 6mm, 13mm, 25mm or 45mm
- ✓ Lift/lower rollerstands (see insert)
- ✓ Fixed safety sides (see insert)
- ✓ Frame pad elevators - special support springs keep the pads off of the suspension system to reduce noise and improve performance

KEY TO OUR TRAMPOLINE CODES:

- GMEX/GM/M** Model of trampoline
- 6/64/13/25** Size of the webbing on the trampoline bed
- L** This trampoline comes complete with lift/lower rollerstands
- E** This trampoline comes complete with pad elevators
- SS** Fixed safety sides

Model	Product Code	Features Included							Dimensions (m)			
		COVERALL PADS	PAD ELEVATORS	LIFT / LOWER ROLLER STANDS	6 X 4MM BED	6MM BED	13MM BED	25MM BED	LENGTH	WIDTH	HEIGHT (OPEN)	HEIGHT (CLOSED)
UNITRAMP GMEX	GMEX 64	✓	✓	✓	✓				5.1	3.0	1.15	2185/1970
	GMEX	✓	✓	✓		✓			5.1	3.0	1.15	2185/1970
UNITRAMP GM	GM 64EL	✓	✓	✓	✓				5.1	3.0	1.05	2185/1970
	GM 64L	✓		✓	✓				5.1	3.0	1.05	2185/1970
	GM 64E	✓	✓		✓				5.1	3.0	1.05	2185
	GM 64	✓			✓				5.1	3.0	1.05	2185
	GM 6EL	✓	✓	✓		✓			5.1	3.0	1.05	2185/1970
	GM 6L	✓		✓		✓			5.1	3.0	1.05	2185/1970
	GM 6E	✓	✓			✓			5.1	3.0	1.05	2185
	GM 6	✓				✓			5.1	3.0	1.05	2185
	GM 13EL	✓	✓	✓			✓		5.1	3.0	1.05	2185/1970
	GM 13L	✓		✓			✓		5.1	3.0	1.05	2185/1970
	GM 13E	✓	✓				✓		5.1	3.0	1.05	2185
	GM 13	✓					✓		5.1	3.0	1.05	2185
UNITRAMP M	M 13L	✓		✓			✓		4.6	2.7	1.0	1970/1745
	M 13	✓					✓		4.6	2.7	1.0	1970
	M 25L	✓		✓				✓	4.6	2.7	1.0	1970/1745
	M 25	✓					✓		4.6	2.7	1.0	1970

If your trampoline needs safety side rails please add SS to the code. Additional sum of (see website) per trampoline. Please note these cannot be used in conjunction with lift/lower rollerstands and increase the width of the trampoline. Overall trampoline dimensions have a tolerance of +/- 60mm (excluding heights). Lift lower roller stands also available with dampers to reduce possibility of handle moving rapidly if accidentally released. Please add DP to code. Additional sum of (see website) per trampoline.



2 INTERNATIONAL SPOTTING DECKS [BUY NOW](#)

Competition spotting decks for GMEX trampoline, complete with wedge shaped absorbent mats. Size: 3.025m x 2.025m x 0.21m including transportation trolley



3 SPOTTING DECKS [BUY NOW](#)

Robustly constructed framework, folding, wheelaway, zinc plated to give an attractive hardwearing finish. Shock absorbing compression springs fitted as standard. Fully adjustable to fit all Unitramp and Nissen trampolines and complete with wedge shape safety mats. Mat size is 2.44m x 1.22m x 0.2m. Ideal for schools and leisure centres



4 SPOTTING RIG

SPT/RIG [Please call for pricing](#) [VIEW PRODUCT](#)

Overhead spotting rig for use with trampolines, complete with all necessary brackets, ropes, pulleys, cleats and shackles (belts not included)

[Please contact our Sales Department for prices and installation details](#)

5 TUMBLING & TWISTING BELTS FOR SPOTTING RIG [BUY NOW](#)

- A **TUM/BLT/SML** Small tumbling belt, to suit waist size 460mm-660mm (18"-26")
- TUM/BLT/MED** Medium tumbling belt, to suit waist size 660mm-830mm (26"-33")
- TUM/BLT/LGE** Large tumbling belt, to suit waist size 830mm-1110mm (33"-44")
- TUM/BLT/STR** Tumbling belt straps (needed if not already on your spotting rig)
- B **TWS/BLT/LGE** Twisting belt – large to suit waist size 760mm – 990mm
- TWS/BLT/SML** Twisting belt – small to suit waist size 500mm – 710mm






TRAMPOLINE SAFETY NEWS FROM AFPE (EXTRACT ONLY PLEASE REFER TO AFPE FOR FULL DETAILS)

This advice is directed at curricular/extra curricular school trampolining which could include where appropriate rotational 360 degree feet to feet movement (basic somersaulting). For high bouncers, additional provision is required in line with British Gymnastics recommendations for club training

THE USE OF END DECKS AND MATTING: The use of end decks and mat surrounds is inter-related to the new spotting code of practice. afPE strongly recommends the use of end decks, particularly where staff wish to develop rotational feet to feet 360 degree movement. British Gymnastics Risk Assessment (Feb 2007) concluded "falls arising from performers projecting from the sides of trampolines were relatively rare and that much greater risk arose from performers projecting from the ends". Matting should be used down the sides of trampolines offering protection to a width of 2m and 20-25mm thickness. It is acceptable for trampolines to be placed side to side or end to end provided the intervening metalwork and springs are suitably protected


SPOTTERS: With the provision of end decks and mat surrounds spotting is no longer seen as essential. Injuries to spotters in the past have contributed towards this thinking. However, providing spotters have been suitably trained and are physically capable they can operate as an additional line of defense. Using pupils in this way can add to their sense of responsibility and involvement. There should be no more than two spotters down each side of the trampoline

In response to this Universal Services now manufacture the correct size mats for the side and ends of trampolines as per these guidelines. We have illustrated below the correct mats required for single and double use trampolines for schools. For regional, club and national competitions further matting is required

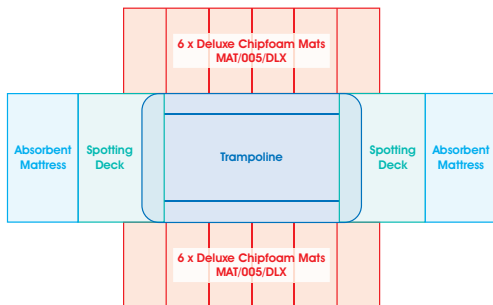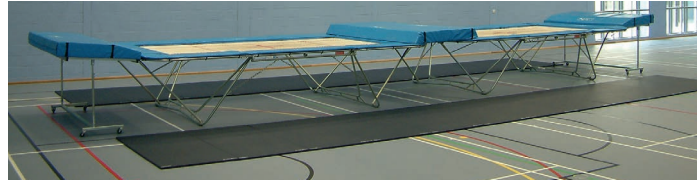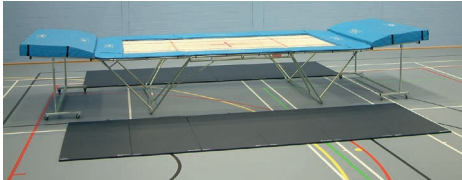

Single trampoline use for curricular/extra curricular school trampolining

This package consists of 1 x GM 13L trampoline, 1 x pair spotting decks, 12 x deluxe mats and 2 x 3000x2000x200 Absorbent Mattress

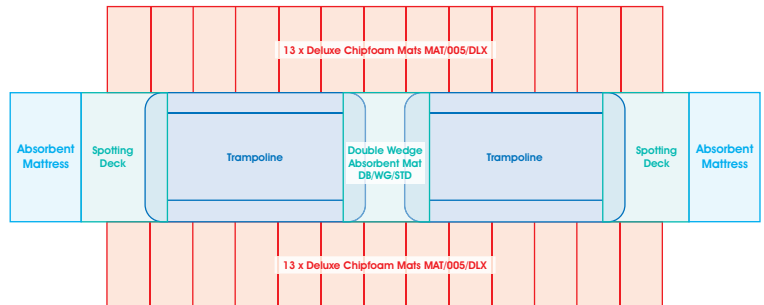

Double trampoline use for curricular/extra curricular school trampolining

This package consists of 2 x GM 13L trampolines, 1 x pair spotting decks, 1 x double wedge mat, 26 x deluxe mats and 2 x 3000x2000x200 Absorbent Mattress

1 THROW IN MAT [BUY NOW](#)

THR/MAT

Throw in absorbent mat with two handles on each long side. Size: 1.7m x 1.0m x 100mm

2 DOUBLE WEDGE ABSORBENT MAT [BUY NOW](#)

Double wedge absorbent mat complete with 4 lifting handles and fixing straps, suitable for placing between end to end trampolines

DB/WG/SML 2.4m x 1.37m x 200mm

DB/WG/STD 3.05m x 1.52m x 266mm

3 ABSORBENT MATTRESS [BUY NOW](#)

MAT/206/STD 3000 x 2000 x 200mm

Manufactured using absorbent durable polyurethane foam with hardwearing nylon reinforced blue PVC covers. Covers are envelope type with hook and loop fastening at one end and complete with webbed carrying handles. All Universal Services absorbent mattresses are supplied with anti-slip base as standard

Flame Retardancy: All covers are flame retardant treated. In our standard range, non combustion modified foam is used

4 DELUXE (CHIPFOAM) MAT [BUY NOW](#)

MAT/005/DLX 2000 x 1000 x 25mm

Manufactured from high grade 10lb density chipfoam, with blue reinforced hardwearing PVC cover adhered to top surface with 2" base overlap. All corners are heat sealed. Complete with ribbed anti-slip latex base as standard

5 TRAMPOLINE STEPS [BUY NOW](#)

TRM/001/STP

Set of foam steps to aid mounting of trampolines, six treads, with heavy duty foam inners and 610gsm PVC coated fabric outer cover. 1000mm high x 1500mm deep x 1000mm wide





1

1 WEB BED

BUY NOW

T/GM/BED/064
T/GM/BED/006
T/GM/BED/013
T/GM/BED/025
T/GM/BED/045
T/M/BED/013
T/M/BED/025
T/M/BED/ULT

6mm x 4mm web bed for GM trampoline
6mm web bed for GM trampoline
13mm web bed for GM trampoline
25mm web bed for GM trampoline
45mm web bed for GM trampoline
13mm web bed for M trampoline
25mm web bed for M trampoline
Ultra mesh bed for M trampoline

2 LIFT/LOWER ROLLERSTANDS

BUY NOW

GM/RST/LLW For GM and Goliath trampolines
M/RST/LLW M and 77a trampolines

Lift/Lower Rollerstands are not suitable with safety side rails



2




3

3 ROLLERSTANDS

BUY NOW

GM/RST/STD For GM trampoline
M/RST/STD For M trampoline

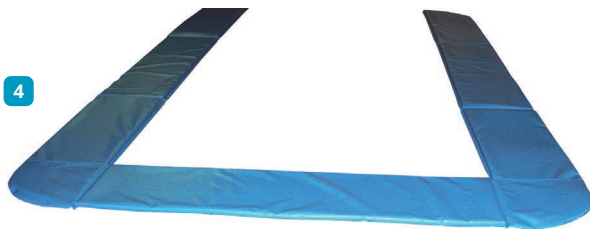

4

4 FRAME PADS

BUY NOW

GM/CPD/STD Coverall frame pads for GM trampoline
GM/CPD/SSD Safety side coverall frame pads for GM trampoline
M/CPD/STD Coverall frame pads for M trampoline
M/CPD/SSD Safety side coverall frame pads for M trampoline

5 TRAMPOLINE COVER

BUY NOW

Blue flame retardant PVC cover for trampoline, cover has full height hook and loop seams at either end to enable the cover to be easily put on and removed. Only suitable for Unitramp and Nissen trampolines and not suitable for trampolines with safety sides

TRM/001/COV For GM trampoline with standard rollerstands
TRM/002/COV For GM trampoline with lift/lower rollerstands
TRM/003/COV For M trampoline with standard rollerstands
TRM/004/COV For M trampoline with lift/lower rollerstands



5



6 10" STEEL SPRING BUY NOW
TRM/SPR/UNI



7

7 RUBBER CABLE BUY NOW
TRM/CBL/UNI



8A



8B

8 CASTOR ASSEMBLY

BUY NOW

A GM/CST/STD (Polyurethane tyre) for GM trampoline
B M/CST/STD (Rubber tyre) for M trampoline



9

9 CHAIN ADJUSTER BUY NOW
TRM/ADJ/UNI



10

10 QUICK LINK JOINER BUY NOW
TRM/LNK/UNI



11

11 ROLLERSTAND HOOK BUY NOW
TRM/RST/HOK
Complete with starlock washer and cap



12

12 5" FLOOR GUARD BUY NOW
TRM/FGD/005
Complete with rivets



13

13 COMPRESSION BUSH ASSEMBLY BUY NOW
TRM/BSH/UNI



14

14 HINGE PIN (SPIRAL) BUY NOW
TRM/HPN/UNI



1 STANDARD MINI TRAMP [BUY NOW](#)

SM Series


Frame size is 1140mm x 1140mm x 310/550mm. Manufactured to the same high standards as our other mini tramps. Fully height adjustable legs. Choice of either solid nylon or 6mm, 13mm or 25mm web bed. Choice of rubber cables or steel springs. Complete with coverall frame pads. Conforms to BSEN 13219:2008

2 3 ELITE DOUBLE MINI TRAMP [BUY NOW](#)

DML 6

DML 13


Competition model Elite double mini tramp. Frame size is 3500mm x 1900mm x 700mm. Constructed from heavy gauge tube, laser cut spring retaining plates and zinc plated. Supplied with fixed height rollerstands for ease of transport. Foam filled side and leg pads which are covered in nylon reinforced PVC. Non-marking floor pads are fitted as standard. Manufactured to FIG specifications. Available with a 6mm or 13mm bed

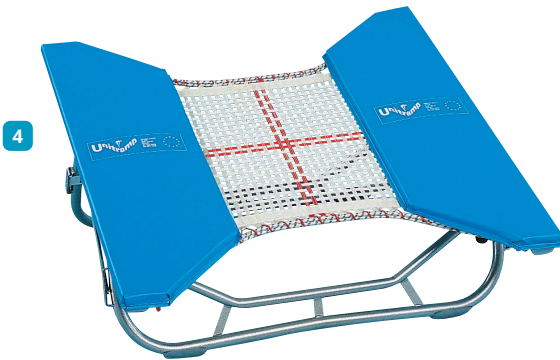

4 OPEN ENDED MINI TRAMP [BUY NOW](#)

OM 13 Series

Frame size is 1210mm x 1185mm x 305/610mm. Constructed from heavy duty gauge tube and zinc plated. Fully height adjustable and supplied with shaped frame pads, steel springs and 13mm web bed

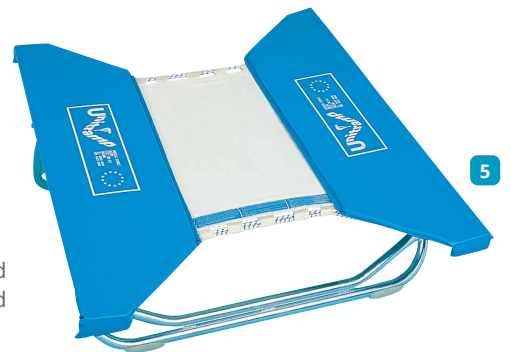

5 SCHOOLS MINI TRAMP [BUY NOW](#)

OM SC Series

Schools open ended mini tramp. Frame size 1210mm x 1185mm x 305/610mm. Constructed from heavy duty gauge tube, zinc plated. Fully height adjustable and supplied with shaped frame pads rubber cables and solid nylon bed

Model	Product Code	Features Included						Dimensions (mm)					
		Coverall Pads	6mm Bed	13mm Bed	25mm Bed	Solid Bed	Rubber Cables	Steel Springs	Length	Width	Height (Front)	Height (Back)	Height (Folded)
1 STANDARD MINI TRAMP	SM MC	✓				✓	✓		1140	1140	310 / 340	365 / 550	
	SM MS	✓				✓		✓	1140	1140	310 / 340	365 / 550	
	SM 25S	✓			✓			✓	1140	1140	310 / 340	365 / 550	
	SM 13S	✓		✓				✓	1140	1140	310 / 340	365 / 550	
	SM 6S	✓	✓					✓	1140	1140	310 / 340	365 / 550	
2 ELITE DOUBLE MINI TRAMP	DML 6	✓	✓					✓	3500	1900	700	450/700	2000
3 ELITE DOUBLE MINI TRAMP	DML 13	✓		✓				✓	3500	1900	700	450/700	2000
4 OPEN ENDED	OM 13	✓		✓				✓	1210	1185	305 / 330	610 / 680	1210
5 SCHOOLS OPEN ENDED	OM SC	✓				✓	✓		1210	1185	305 / 330	610 / 680	1210



1 LEG BRACE SPRING
MIN/BRC/SPR [BUY NOW](#)




2 MINI TRAMP CORNER CABLE
MIN/CBL/CNR [BUY NOW](#)



3 COVERALL PADS [BUY NOW](#)
MIN/CPD/STD

Coverall pad complete with lace cord and front loop for standard mini tramp

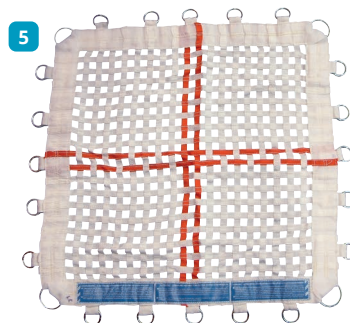

4 SOLID REPLACEMENT BED [BUY NOW](#)
MIN/BED/OEM For schools open ended min tramp
MIN/BED/CBL For standard mini tramp with cables
MIN/BED/SPR For standard mini tramp with springs



5 REPLACEMENT WEB BED [BUY NOW](#)

MIN/BED/13 13mm web bed for standard mini tramp
MIN/BED/25 25mm web bed for standard mini tramp
OEM/BED/013 13mm web bed for open ended mini tramp
DBL/MIN/BED 13mm web bed for double mini tramp



6 8'6" REPLACEMENT CABLE
MIN/CBL/LNG [BUY NOW](#)



7 MINI TRAMP LACE CORD
MIN/CRD/UNI [BUY NOW](#)



8 CABLE RUNNER
MIN/CBL/RNR [BUY NOW](#)
Cable runner for joining cable lengths



9 STEEL SPRING [BUY NOW](#)
MIN/SPR/STL For standard and open ended mini tramps
TRM/SPR/001/UNI For double mini tramp



10 FLOOR GUARD COMPLETE WITH RIVETS
TRM/FGD/005 [BUY NOW](#)




11 CABLE Q HOOK [BUY NOW](#)
MIN/CBL/HOK



12 LEG BRACE ADJUSTER SCREW
MIN/BRC/ADJ [BUY NOW](#)

13 COMPRESSING BUSH [BUY NOW](#)
MIN/COM/BSH For standard mini tramp
TRM/BSH/UNI For double mini tramp

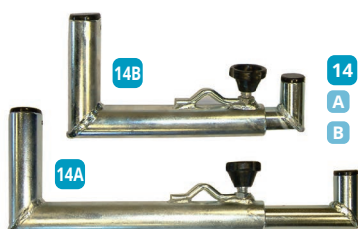

14 LEG BRACES [BUY NOW](#)
A MIN/BRC/LNG Long leg brace
B MIN/BRC/SHT Short leg brace



15 LEG SECTIONS [BUY NOW](#)
Complete with floor guards for standard mini tramps
A MIN/LEG/LRG/STD Large leg section
B MIN/LEG/SHT/STD Short leg section